

Chinese Bun Steam Display

Easy operation, easy cleaning and good looking bun steaming unit.



BS460-US


Features:

- Special curved front glass with edges that allows food to be viewed from all angles.
- This heating unit keeps food warm in a moist environment using an aluminum die-casting heater.
- Steam from the internal water tank is controlled by the micro computer controls and is equipped with 3 safety features to prevent over heating.
- Built with a double layered front glass, flourescent lamp, 5 shelves at a 5.0 degree tilt, and includes one pair of serving tongs.

※Buns for this steamer should be precooked ...

MODEL	BS460-US
Light	Fluorescent Lamp (30W x 1)
Power consumption	1630W/120V AC 60Hz
Weight	111 lbs (approx.)
Dimensions (W)X(D)X(H)	18.9" × 21.1" × 33.7"
Heating method	aluminum die-casting heater
Operating Temp	167.0F ± 1.8F
Capacity	5 inner trays (15.1" × 14.4")

Specifications may be changed to better the product without notice.

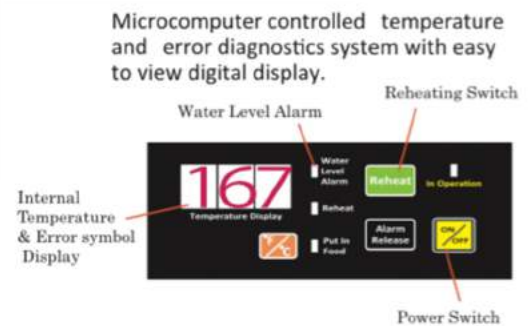

Hot Beverage Warmer

Storage and display cases for ready to drink beverages.



PW120-S4-US

Features:

- Built for 24 hour / 365 day non-stop operation.
- Multiple models available for various counter top spaces.
- Doors built on both sides of unit allowing for:
 - Easy access from customer side.
 - Convenient refilling from clerk side.
 - First-in / First-out system ensures beverage freshness.
- Beverage temperature monitored by electronic thermostat located underneath each shelf.
 - Each shelf has its own ON/OFF switch.
- Each shelf constructed with a built in temperature safety device.
- Easily increase impulse buys.

MODEL	SW40-N2-US	PW60-N3-US	PW90-S3-US	PW120-S4-US	
Capacity	350ml	40pcs. (4x5x2stages)	60pcs. (4x5x3stages)	90pcs. (6x5x3stages)	120pcs. (6x5x4stages)
	190ml 250ml	60pcs. (5x6x2stages)	90pcs. (5x6x3stages)	126pcs. (7x6x3stages)	168pcs. (7x6x4stages)
Dimensions (W)X(D)X(H)	13.2" × 16.8" × 19.1"	13.2" × 16.8" × 27.8"	18.5" × 16.8" × 27.8"	18.5" × 16.8" × 31.7"	
Weight	26.5 lbs(approx.)	37.5 lbs(approx.)	53 lbs (approx.)	61.8 lbs(approx.)	
Power consumption	300W/120V AC 60Hz	450W/120V AC 60Hz	615W/120V AC 60Hz	820W/120V AC 60Hz	
Beverage temperature	131F ± 7.2F (at the room temperature 68F)				
Shelf heating range	122F to 266F				
Safety device	High temperature cut-off switch w/reset button				

Specifications may be changed to better the product without notice.



PW90-S3-US

PW120-S4-US



SW40-N2-US

PW60-N3-US